


DATA SHEET

CSE OTS MFB+ZV W Pump Station

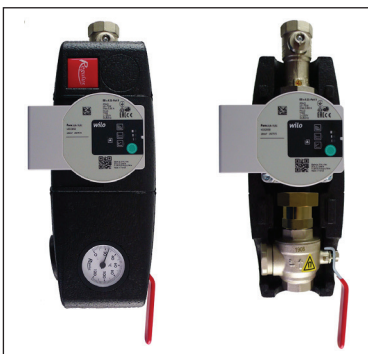

Main Features


Application	Heating system flow.
Description	Consists of PARA 25/8 SC 130 mm pump, ball valve w. non-return valve, ball valve w. strainer and magnet, thermometer, insulation.
Working fluid	Water; water-glycol mixture (max. 1:1) or water-glycerine mixture (max. 2:1)
Installation	Flow pipe, min. pipe centre distance from wall = 100 mm.
Code	17818

Data for CSE OTS MFB+ZV W Pump Station

Fluid working temperature	5–95 °C
Max. working pressure	10 bar
Min. working pressure	0.5 bar
Ambient temperature	5–40 °C
Max. relative humidity	80 %, non condensing
Power supply	230 V, 50 Hz
Insulation material	EPP RG 60 g/l
Overall dimensions	345 x 140 x 150 mm
Total weight	3.6 kg
Connections	2 x G 1" F


PARA 25/8 SC Pump Connection – Molex connectors

1. POWER SUPPLY (1 ~ 230 V, 50 Hz)

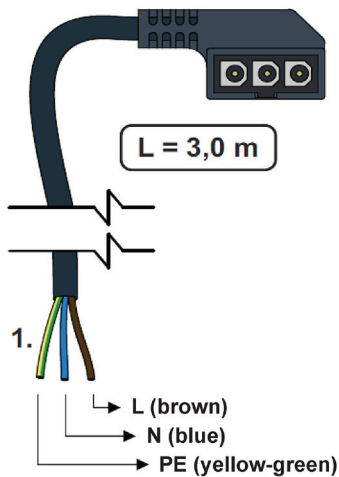

Pump power cable is included in supply.

Performance Curves for PARA 25/8 SC Pump

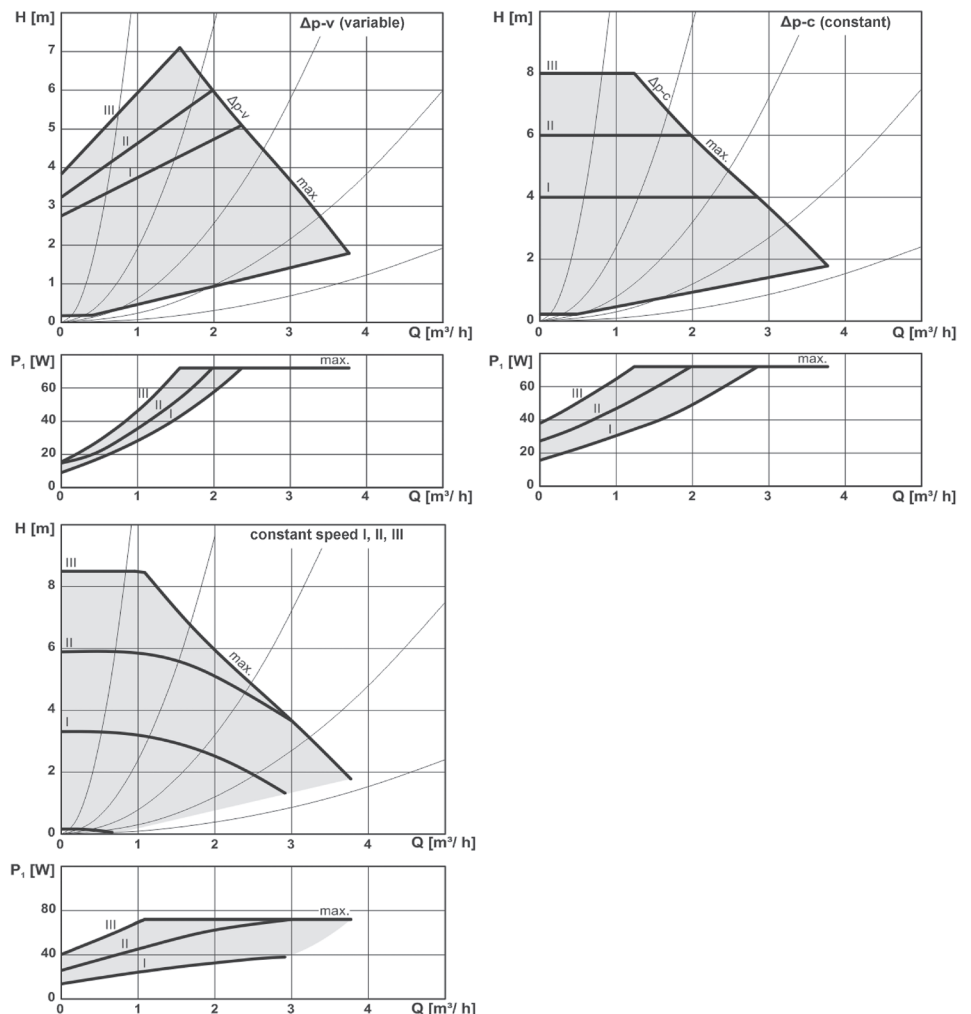

DATA SHEET

CSE OTS MFB+ZV W Pump Station

Pressure drop graph