

ELECTRONIC ROOM THERMOSTATS

TP18

A simple electronic room thermostat with an LCD display, showing the room temperature and the current state (ON/OFF). Battery powered, 2x AAA.




Technical Data	TP18
Operating voltage	24 - 230 V
Max. contact load	5(3.5)A
Power supply to contacts	2 x 1.5 V AAA
Code	7355

TP34 and TP34 RF

Simple electronic room thermostat with LCD display for heating and cooling, showing room temperature, set temperature and current thermostat status (heating/cooling/frost protection). Battery powered, 2x AAA.

TP34 RF is a wireless version with a receiver that allows remote thermostatic control of the boiler or air conditioning, thermostat shutdown and manual control of the connected device.

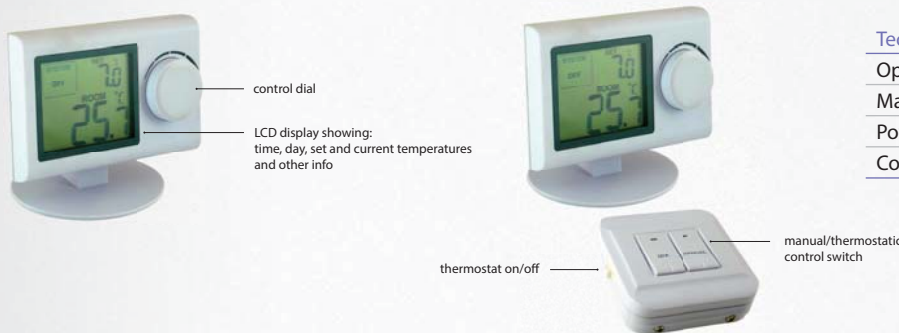


Technical Data	TP34	TP34 RF
Operating voltage	230 V	
Max. contact load	6(2)A	
Power supply to contacts	2 x 1.5 V AAA	
Code	17168	17169

TP39 and TP69

A simple electronic room thermostat with an LCD display, showing the room temperature and the current state (ON/OFF). Mains powered (230 V), no batteries needed.

TP 39 is controlled by a dial, TP 69 by keys.

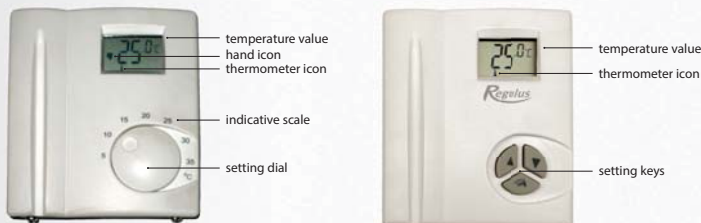

Technical Data	TP39	TP 69
Operating voltage	230 V / 50 Hz	
Max. contact load	16(3) A	
Power supply to contacts	230 V	
Code	6299	11583

Note. TP69 returns to factory defaults, i.e. 22 °C, in case of power failure.

TZ33 and TZT63

Plug-in electronic thermostat with LCD display that shows the room temperature and the current thermostat status (on/off). The LED below the display shows the current status of the electrical socket (switched on - off). It is power supplied from 230 V mains voltage (no batteries required). The TZ33 is controlled by a dial, the TZT 63 by keys, being moreover equipped with a timer and antifrost protection. The timer allows to switch on the socket regardless of the set thermostat temperature for a preset time interval between 15 minutes and 5 hours. Then it automatically returns to thermostat mode.



Technical Data	TZ33	TZT63
Operating voltage	230 V / 50 Hz	
Max. contact load	16(3) A	
Power supply to contacts	230 V	
Code	6295	8269

Note. TZT63 returns to factory defaults, i.e. 20 °C, in case of power failure.